


3296 Trimming potentiometer

10x9.5 Square/Multiturn/Elecsound Brand



Characteristics

Electrical Characteristics

- (Standard Resistance Range).....10Ω—2MΩ
- (Resistance Tolerance).....±10%
- (Terminal Resistance).....≤1%R or 2Ω
- (Contact Resistance Variation).....≤3%R Or 3Ω
- (Insulation Resistance).....R1≥1GΩ
- Winthstand Voltage).....101.3Pa 600V,8.5kPa 360V
- (Effective Electrical Travel).....30±2 cycles

Envlonment Characteristics

- (Rated Power)..... + 70 0.5W , + 125 OW
- (Temperature Range)..... - 55 — + 125
- (Temperature Coefficient).....±250 , ±100ppm /
- (Temperature Variation)..... R≤±2%R , (Uab / Uac)≤±1%
- (Vibration).....390m / s2,4000 times , R≤±1%R
- (Collision).....10—500HZ,0.75mm, Or 98m / s2,6h
- R < ±1%R, (Uab / Uac)≤±2%
- (Climate Category)..... R≤±3%R , R1≥100MΩ
- (Electrical Endurance at 70).....0.5W,1000h, R≤±10%R
- (Mechanical Endurance).....200(cycles), R≤±10%R
- (Steadydamp-heat)..... R≤±3%R , R1≥100MΩ

Physical Characteristics





- (Total Machanical Travel).....30±2(cycles)
- (Staring Torque).....≤20mN·m
- (Clutch Torque).....≤36mN·m

Standard Resistance Table

Resistance(Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205


调节方式

Adjust Methods




安装方式

Dimensions

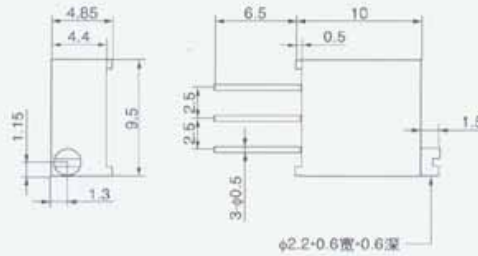

共有尺寸图

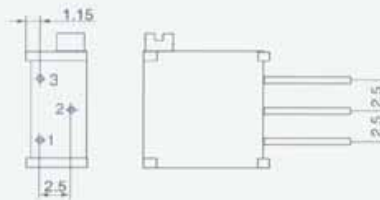


3296Z型




3296P型



3296X型

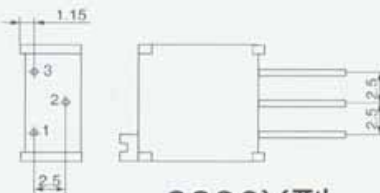

3296Y型

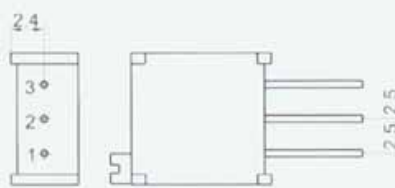

3296W型

订购指南 How To Order

3296-W-102

Model 产品型号

Style 引出方式

Code 阻值代码

注: 可提供特殊阻值。

Special resistances available